


NEW MODEL !



Conductive hose

Tom Flex-easy Hose

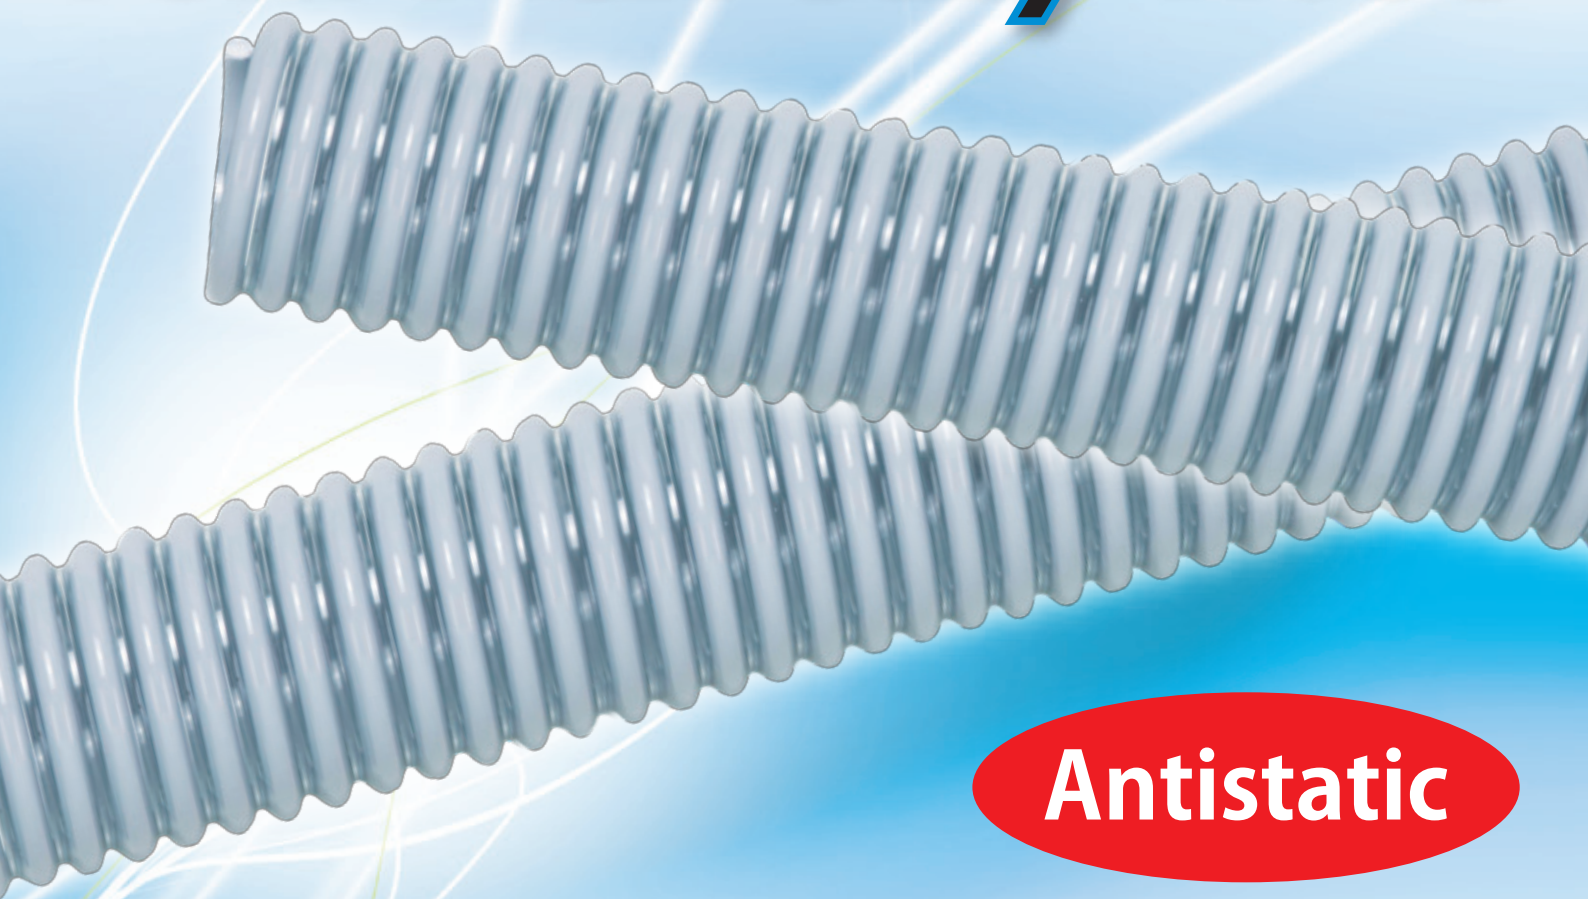


Antistatic

MADE IN JAPAN

Nominal designation	I.D. (mm)	O.D. (mm)	Pitch (mm)	Maximum Working Pressure (MPa at 20°C)	Temperature (-0.1MPa/-760mmHg) (°C)	Minimum bending radius (mm)	Weight (g/m)	Regular size(m)
TPE-32	32.0	40.5	8.0	0.25	55	80	420	20
TPE-38	38.1	46.5	10.0	0.25	55	100	570	20
TPE-50	50.8	62.0	11.0	0.25	50	120	940	20
TPE-63	63.5	76.5	14.5	0.25	50	150	1300	20

Working Temperature -10°C~ +50°C

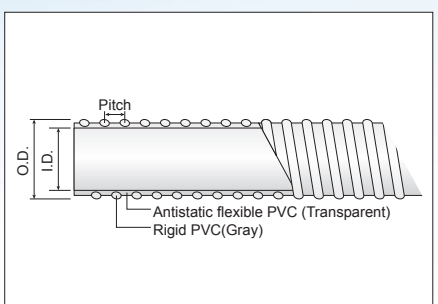

Use	Features	Fluid
<ul style="list-style-type: none"> •Conveying of plastic pellets. •Conveying of powders and grains. 	<ul style="list-style-type: none"> •Excels in static prevention effects by use of anti-static build-up PVC. •Transparent making it possible to confirm the contents. 	Powder