

# A versatile conductive air hose is now available!

TOGAWA UB-easy AIR HOSE 8.5x12.5 WP1.5MPa MADE IN JAPAN 170215 -007-


**Antistatic**

# UB-easy AIR HOSE


**MADE IN JAPAN**

Polyurethane product

Nominal designation	I.D. (mm)	O.D. (mm)	Regular Size (m)	Max. Working Pressure MPa at 20°C	Min Bending radius (mm)	Regular size weight (kg)
UB-6510	6.5	10.0	100	1.5	35	5.4
UB-8512	8.5	12.5	100	1.5	45	8.3

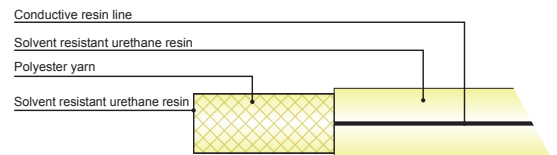

Working temperature limit: Between -5°C~+60°C

Applications	Features	Fluids
Conductive air hose for painting	Just tighten the metal fittings! No need to bare ground wire.	 Air

●As a conductive sleeve is applied around the outer layer, the grounding can be completed just by tightening the metallic joint (when the resistance value is  $9 \times 10^6 \Omega$  or less, and the whole length is 15m or less).